


A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked	RoHS Compliant.					
V1.0	Sketch only	03/11/2020									

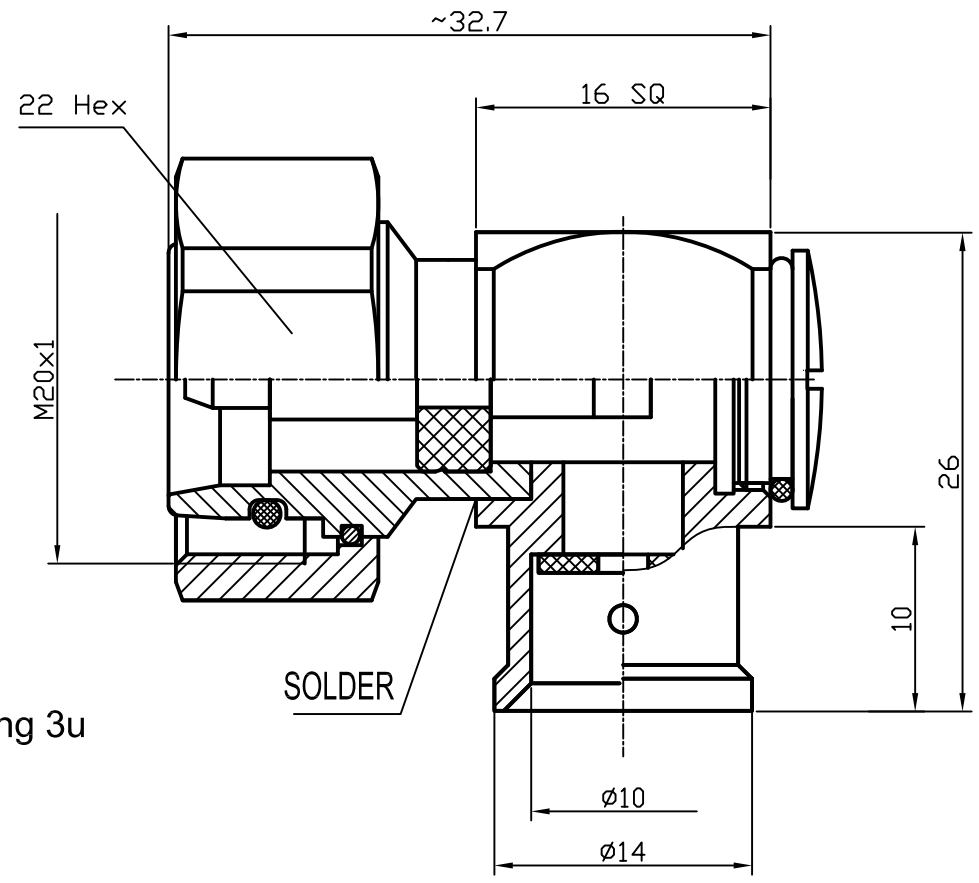

Interface Per: MIL-STD-348, IEC 60169-54
 Cable Type: 3/8" SUPERFLEX

Material & Finishing:

1. Center condutor: Phosphor Bronze, Siliver Plating 3u
2. Insulators: PTFE
3. Body : Brass, Ternary Alloy Plating 3u
4. Other Metal Parts: Brass, Nickel Plating 3u
5. Gasket: Silicone Rubber,Color Red

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~3GHz
3. VSWR:1.3Max
4. Proof Voltage : 2.5KVeFF
5. Working voltage: 1KVeFF

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.07.015
	Drawn	DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: 4.3/10 PLUG R/A SOLDER FOR 3/8" REGULAR			
Approved		DATA:				