


A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked					RoHS Compliant.	
V1.0	Sketch only	25/04/2025									

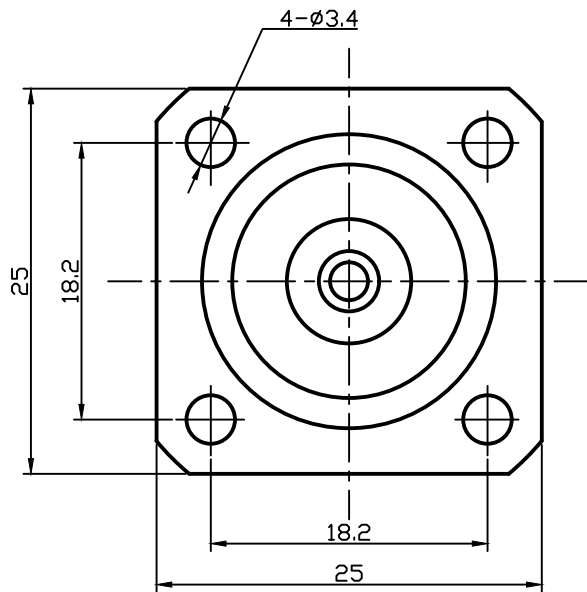

Interface Per: MIL-STD-348, IEC 60169-16


Cable Type: RG316,RG174


Material & Finishing:

- Center condutor: Phosphor bronze, Gold Plating
- Insulators: PTFE
- Body : Brass, Nickel Plating
- Crimping Ferrule: Soft Copper,Nickel Plating

Electrical Data:

- Impedance: 50 Ohms
- Frequency: 0~3GHz
- VSWR: ≤1.2
- Dielectric Withstanding voltage:1000V Min
- Voltage Rating : 500V Max

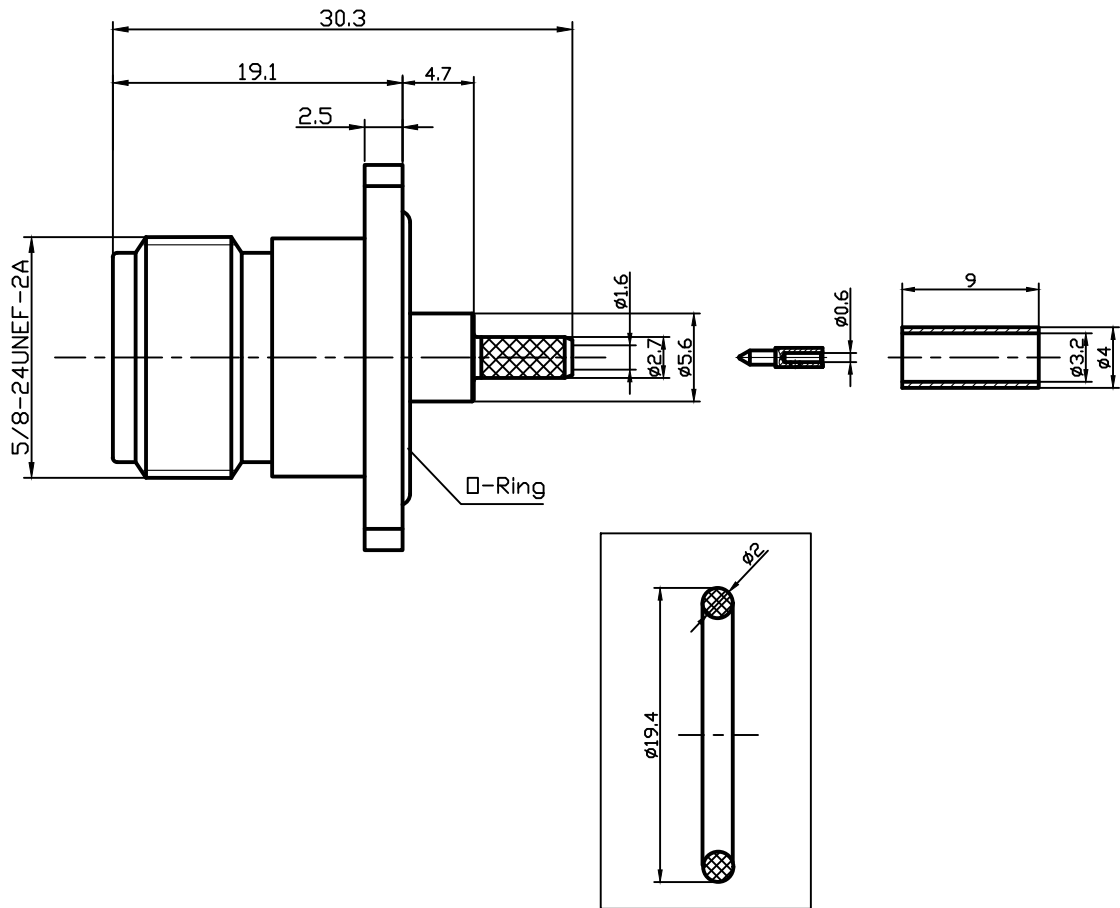

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.04.0295
Drawn	DATA:		Projection		Cust P/N.	TBD
Checked	DATA:		Title: N JACK FOR RG316 CABLE			
Approved	DATA:					