

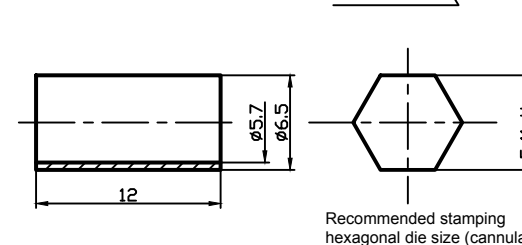




RevNo	Revision note	Date	Signature	Checked
V1.0	Sketch only	04/03/2025		

RoHS Compliant.

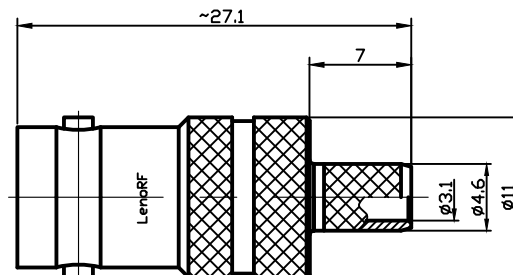

Interface Per: MIL-STD-348, IEC 60169-8
Cable Type: RG58

Material & Finishing:

1. Center condutor: Phosphor bronze, Gold Plating
2. Insulators: PTFE
3. Body : Brass, Nickel Plating
4. Crimping Ferrule: Soft Copper, Nickel Plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: ≤ 1.2 @ 900MHz,
 ≤ 1.25 @ 1800MHz,
 ≤ 1.35 @ 3000MHz,
 ≤ 1.6 @ 6000MHz,
4. Insertion loss: ≤ 0.05 dB @ 900MHz,
 ≤ 0.05 dB @ 1800MHz,
 ≤ 0.05 dB @ 3000MHz,
 ≤ 0.1 dB @ 6000MHz
5. Dielectric Withstanding voltage: 1000V Min
6. Voltage Rating : 500V Max

Package : 1 PC per bag
Laser Mark: LenoRF

Label Content:

LenoRF
Part No: 3.05.109
Part Name: BNC JACK FOR RG58 CABLE
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.05.109
Drawn	DATA:		Projection		Cust P/N.	TBD
Checked	DATA:		Title: BNC JACK CRIMP FOR RG58 CABLE			
Approved	DATA:					