

A		B		C	
RevNo	Revision note	Date		Signature	Checked
V1.0	Sketch only	18/03/2024			

RoHS Compliant.

Interface Per: MIL-STD-348, IEC 60169-16
Cable Type: N/A


Material & Finishing:

- 1. Center condutor: Phosphor bronze, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Nickel Plating
- 4. Sealing ring, Silicone rubber,Red

Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~6GHz
- 3. VSWR: ≤1.1 @ 900MHz,
≤1.15 @ 1800MHz,
≤1.2 @ 3000MHz,
≤1.3 @ 6000MHz
- 4. Insertion loss: ≤0.05dB @ 900MHz,
≤0.05dB @ 1800MHz,
≤0.05dB @ 3000MHz,
≤0.1dB @ 6000MHz,
- 5. Dielectric Withstanding voltage:1000V Min
- 6. Voltage Rating : 500V Max

Package : 1 PC per bag
Laser Mark: LenoRF

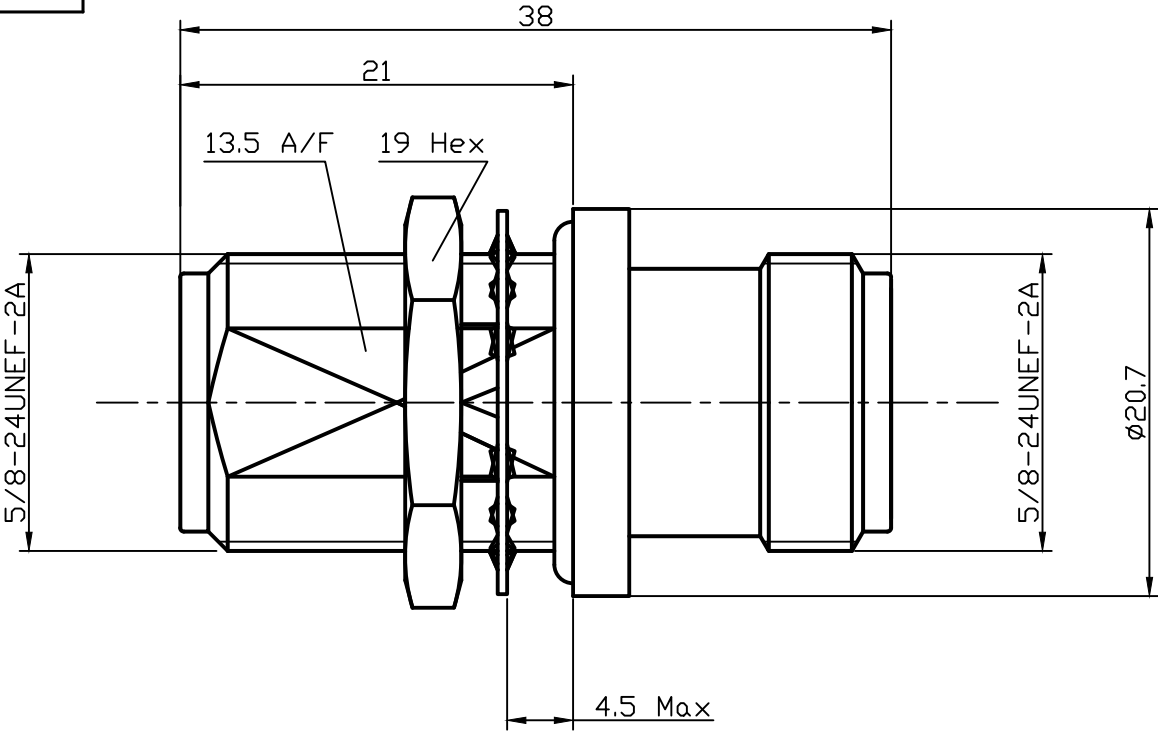

Label Content:

LenoRF
Part No: 3.17.098
Part Name: N JACK TO N JACK RF ADAPTOR
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.17.098
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: N JACK TO N JACK RF ADAPTOR			
Approved		DATA:				