


A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked					RoHS Compliant.	
V1.0	Sketch only	06/09/2025									

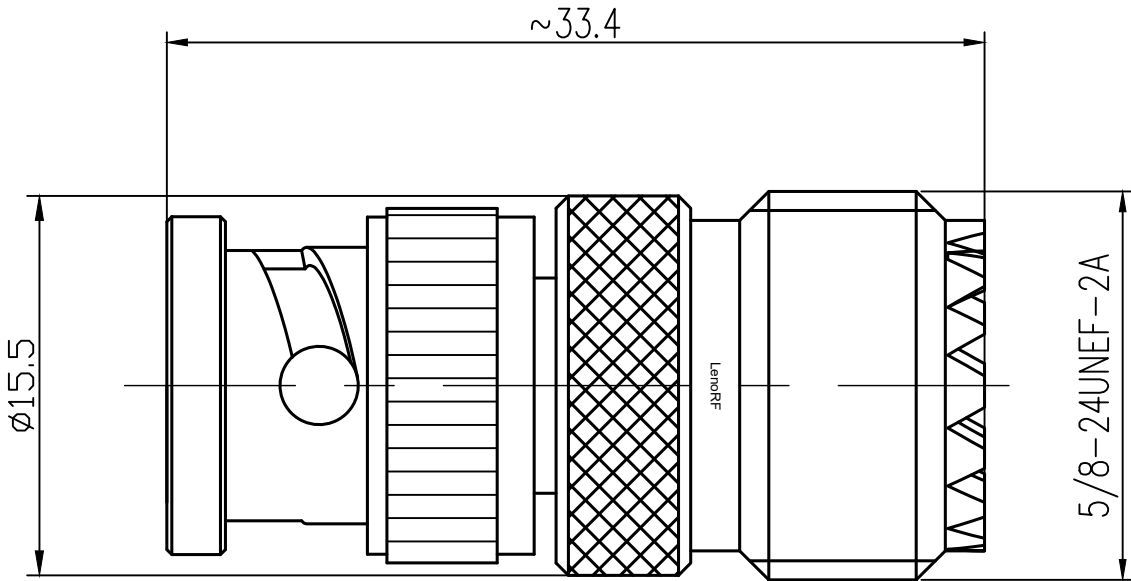

Interface Per: MIL-STD-348

Material & Finishing:

- Center conductor: Brass, Silver Plating
- Insulators: PTFE
- Body : Brass, Nickel Plating


Electrical Data:

- Impedance: 50 Ohms
- Frequency: 0~1GHz
- VSWR: ≤1.5
- Insertion loss: ≤0.1dB
- Dielectric Withstanding voltage:1500V Min
- Voltage Rating : 750V Max

Package : 1 PC per bag
Laser Mark: LenoRF

Label Content:

LenoRF
Part No: 3.17.106
Part Name: BNC PLUG TO UHF JACK RF ADAPTER
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .X ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	3.5 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.17.106
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: BNC PLUG TO UHF JACK RF ADAPTER			
Approved		DATA:				