

A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked					RoHS Compliant.	
V1.0	Sketch only	21/01/2025									

Interface Per: MIL-STD-348,

Material & Finishing:


1. Center condutor: Beryllium bronze, Gold Plating
2. Insulators: PTFE
3. Body : Brass, Ternary alloy Plating
4. Sealing ring: Silicone rubber, Red

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~6GHz
3. VSWR: ≤1.05 @ 900MHz,
 ≤1.1 @ 1800MHz,
 ≤1.15 @ 3000MHz,
 ≤1.2 @ 6000MHz
4. Insertion loss: ≤0.05dB @ 900MHz,
 ≤0.05dB @ 1800MHz,
 ≤0.05dB @ 3000MHz,
 ≤0.1dB @ 6000MHz,
5. Proof Voltage : 500 Veff
6. Working voltage: 350 Veff


Package : 1 PC per bag

Laser Mark: LenoRF

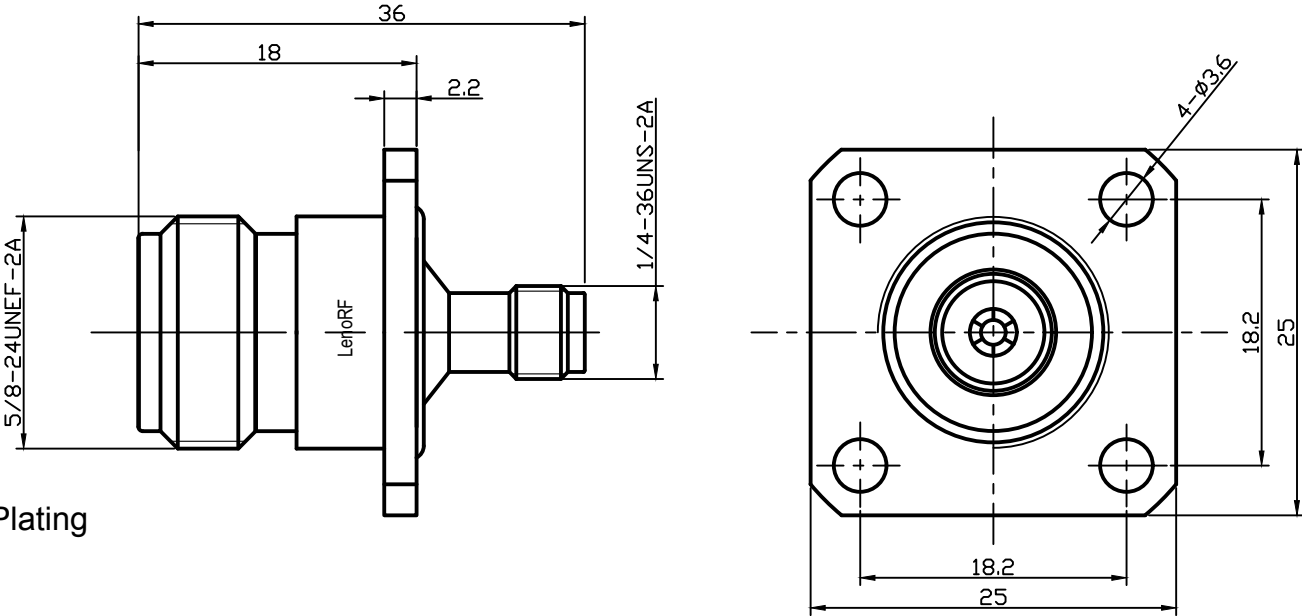

Label Content:

LenoRF
Part No: 3.17.127
Part Name: SMA JACK TO N JACK WITH 4 HOLE FLANGE ADAPTOR
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.17.127
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: SMA JACK TO N JACK WITH 4 HOLE FLANGE ADAPTOR			
Approved		DATA:				