

A		B		C		D		E		F	
RevNo	Revision note	Date		Signature	Checked	RoHS Compliant.					
V1.0	Sketch only	21/01/2025									

4

4

3

3

2

2

1

1

Interface Per: MIL-STD-348,

Material & Finishing:


- 1. Center condutor: Beryllium bronze, Gold Plating
- 2. Insulators: PTFE
- 3. Body : Brass, Gold Plating

Electrical Data:

- 1. Impedance: 50 Ohms
- 2. Frequency: 0~6GHz
- 3. VSWR: ≤1.05 @ 900MHz,
 ≤1.1 @ 1800MHz,
 ≤1.15 @ 3000MHz,
 ≤1.2 @ 6000MHz
- 4. Insertion loss: ≤0.05dB @ 900MHz,
 ≤0.05dB @ 1800MHz,
 ≤0.05dB @ 3000MHz,
 ≤0.1dB @ 6000MHz,
- 5. Proof Voltage : 500 Veff
- 6. Working voltage: 350 Veff


Package : 1 PC per bag

Laser Mark: LenoRF

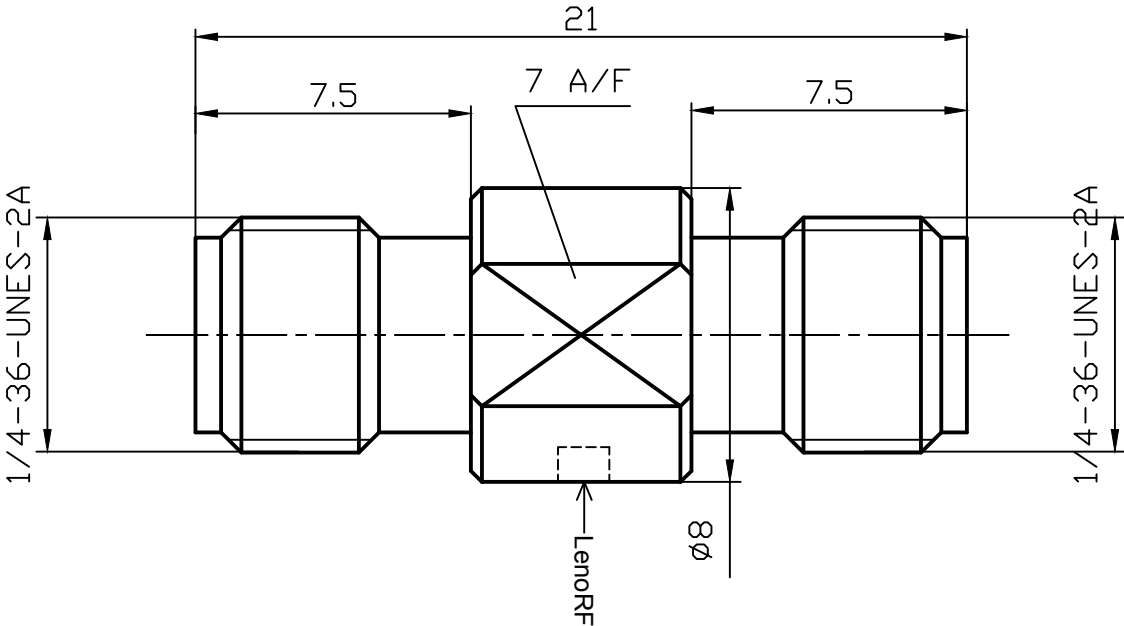

Label Content:

LenoRF
 Part No: 3.17.128
 Part Name: SMA JACK TO SMA JACK ADAPTER
 QTY: 1 PC
 Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .X ±0.15 .XX ±0.1 .XXX ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	8 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.17.128
Drawn		DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: SMA JACK TO SMA JACK ADAPTOR			
Approved		DATA:				

A		B		C		D		E		F	
---	--	---	--	---	--	---	--	---	--	---	--