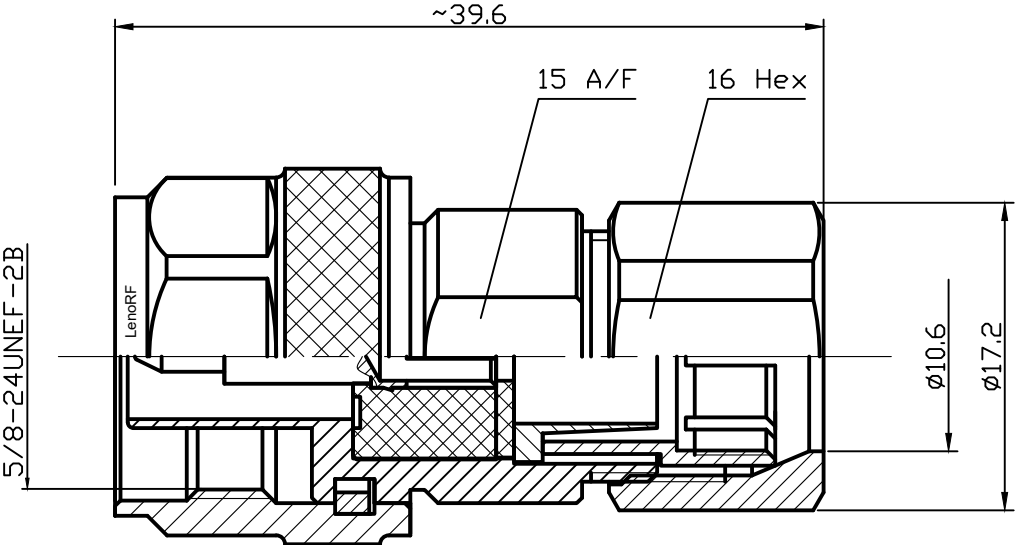


A		B		C		D		E		F																																									
RevNo	Revision note		Date	Signature	Checked	RoHS Compliant.																																													
V1.0	Sketch only		29/10/2025																																																
4 3 2 1																																																			
Interface Per: MIL-STD-348, IEC 60169-16 Cable Type: LMR400, RG8 Material & Finishing: - Center conductor: Phosphor bronze, Gold Plating - Insulators: PTFE - Body : Brass, Nickel Plating - Crimping Ferrule: Soft Copper,Nickel Plating Electrical Data: - Impedance: 50 Ohms - Frequency: 0~6GHz - VSWR: ≤1.15 @ 900MHz, ≤1.2 @ 1800MHz, ≤1.3 @ 3000MHz, ≤1.5 @ 6000MHz, - Insertion loss: ≤0.05dB @ 900MHz, ≤0.05dB @ 1800MHz, ≤0.05dB @ 3000MHz, ≤0.1dB @ 6000MHz, - Dielectric Withstanding voltage:1000V Min - Voltage Rating : 500V Max Package : 1 PC per bag Laser Mark: LenoRF						Label Content: LenoRF Part No: 3.04.0322 Part Name: N JACK FOR RG8, LMR400 CABLE QTY: 1 PC Date: WW/YY (Week/year) <table><tr><td rowspan="4">Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°</td><td>Material:</td><td>See Notes</td><td>Weight</td><td>g</td><td colspan="2" rowspan="4"></td></tr><tr><td>Finish:</td><td>See Notes</td><td>Scale</td><td>8 : 1</td></tr><tr><td>Unit</td><td>mm</td><td>Page</td><td>01</td></tr><tr><td>REV.</td><td>V1.0</td><td>p/n</td><td>01</td></tr><tr><td>Drawn</td><td></td><td>DATA:</td><td>Projection</td><td></td><td>DWG NO.</td><td>3.04.0185</td></tr><tr><td>Checked</td><td></td><td>DATA:</td><td>Title:</td><td></td><td>Cust P/N.</td><td>TBD</td></tr><tr><td>Approved</td><td></td><td>DATA:</td><td colspan="4">N PLUG CLAMPING FOR RG8 CABLE</td></tr></table>						Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g			Finish:	See Notes	Scale	8 : 1	Unit	mm	Page	01	REV.	V1.0	p/n	01	Drawn		DATA:	Projection		DWG NO.	3.04.0185	Checked		DATA:	Title:		Cust P/N.	TBD	Approved		DATA:	N PLUG CLAMPING FOR RG8 CABLE			
Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g																																															
	Finish:	See Notes	Scale	8 : 1																																															
	Unit	mm	Page	01																																															
	REV.	V1.0	p/n	01																																															
Drawn		DATA:	Projection		DWG NO.	3.04.0185																																													
Checked		DATA:	Title:		Cust P/N.	TBD																																													
Approved		DATA:	N PLUG CLAMPING FOR RG8 CABLE																																																
A		B		C		D		E		F																																									