


A		B		C		D		E		F	
RevNo	Revision note		Date	Signature	Checked	RoHS Compliant.					
V1.0	Sketch only		12/21/2017								

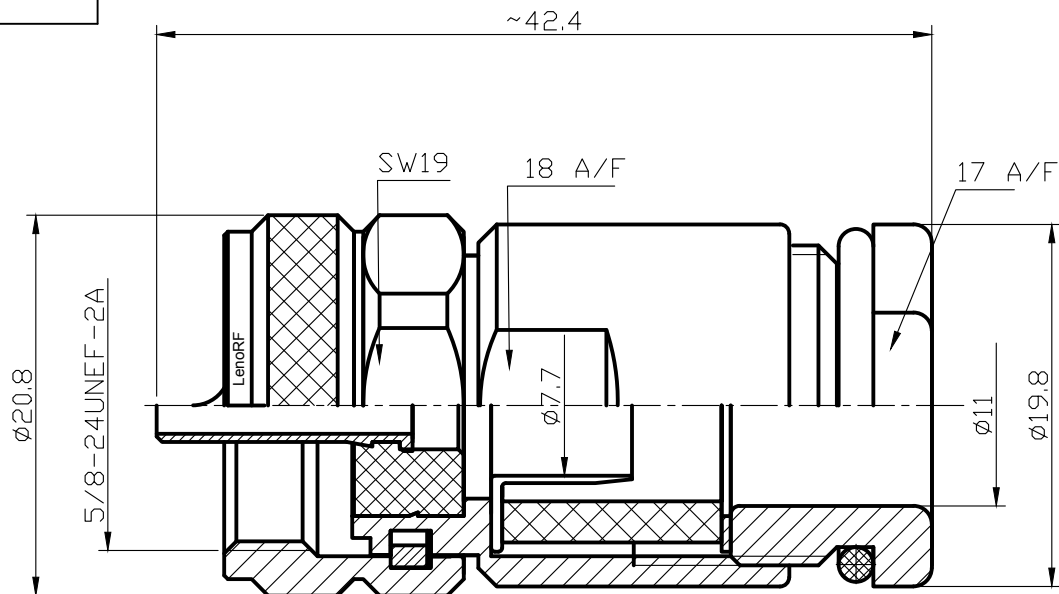

Interface Per: MIL-STD-348, IEC 60169-15

Material & Finishing:

1. Center condutor: Brass, Silver Plating
2. Insulators: PTFE
3. Body : Brass, Ternary Alloy Plating
4. Other Metal Parts: Brass, Ternary Alloy Plating

Electrical Data:

1. Impedance: 50 Ohms
2. Frequency: 0~300MHz
3. VSWR: ≤1.3
4. Insertion loss: ≤0.1dB
5. Dielectric Withstanding voltage:1000V Min
6. Voltage Rating : 500V Max

Package : 1 PC per bag

Laser Mark: LenoRF

Label Content:

LenoRF
Part No: 3.08.025
Part Name: UHF Plug Clamp Straight for RG213 Cable
QTY: 1 PC
Date: WW/YY (Week/year)

Unless otherwise specified, tolerances as below: .x ±0.15 .xx ±0.1 .xxx ±0.05 Angle: ±2°	Material:	See Notes	Weight	g		
	Finish:	See Notes	Scale	2.5 : 1		
	Unit	mm	Page	01		
	REV.	V1.0	p/n	01	DWG NO.	3.08.025
	Drawn	DATA:	Projection		Cust P/N.	TBD
Checked		DATA:	Title: UHF Plug Clamp Straight for RG213 Cable			
Approved		DATA:				